



## FEATURE

- · Solder able with auto dipping.
- · Snap-in type also available.


## **APPLICATIONS**

• Various control applications with general consumer electronics products, mixer, industrial machines, etc.

## **◆ COMMON SPECIFICATIONS**

Characteristics	Specification
Operating temperature range	-10°C to +70°C
Operating force	10 ~ 80 gf
Total resistance	$5 \text{K}\Omega \times 10 \text{K}\Omega \times 20 \text{ K}\Omega \times 50 \text{ K}\Omega \times 100 \text{ K}\Omega \times 250 \text{ K}\Omega \times 500 \text{K}\Omega$
Total resistance tolerance	±20%
Resistance taper	A,B,C
Sliding service life	15,000 cycles

♦ DIMENSIONS Unit: mm

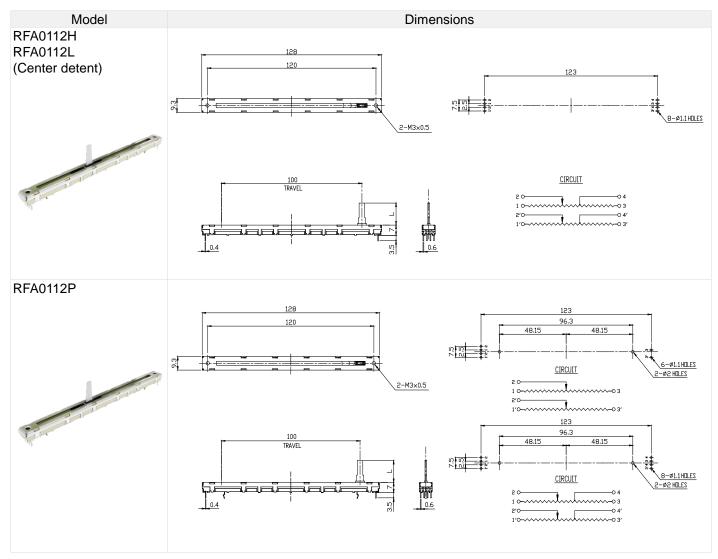

Note: The outline dimensions and shape of RFA011Y are the same as those of RFA0112.