

# SLIDE POTENTIOMETER

## Low-Profile With Motor Type




### ◆ FEATURE

- Programmable and precise slide pattern.
- Touch sensitive lever which enables fader to the slightest physical contact.

### ◆ APPLICATIONS

- Master volume control in high-grade audio equipment fader for studio mixer, etc.

R	F	A	0	J	1	1	G	9	0	0	1
---	---	---	---	---	---	---	---	---	---	---	---

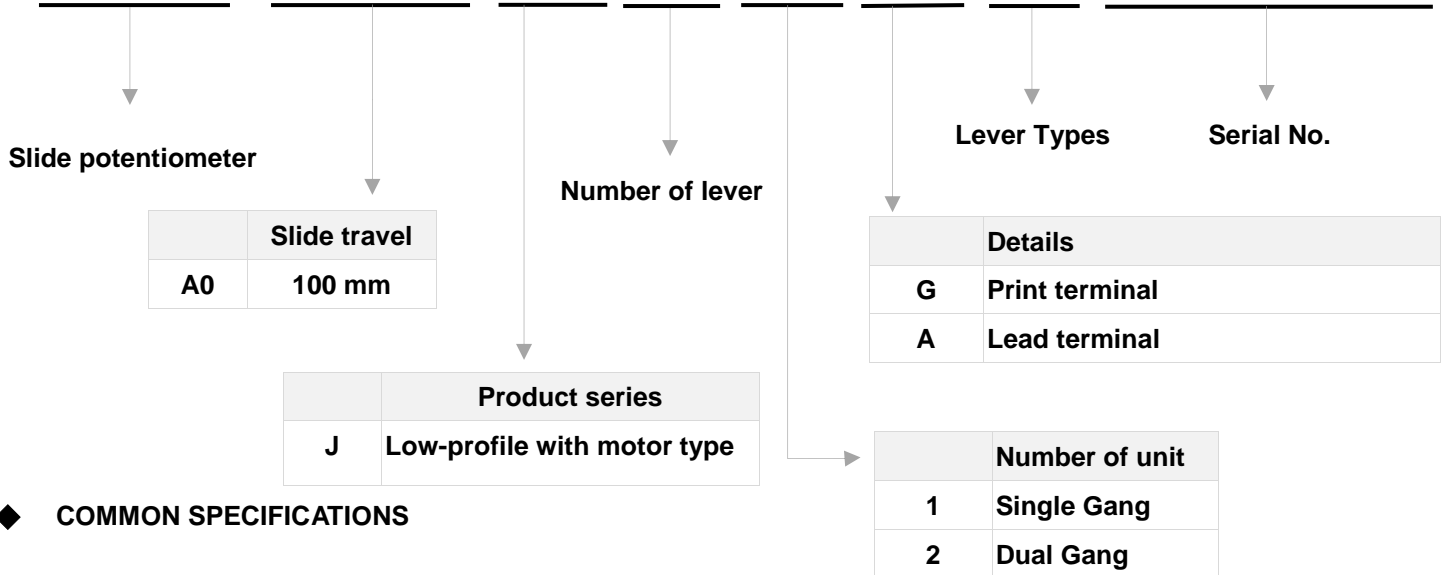

### ◆ COMMON SPECIFICATIONS

Characteristics	Specification
Operating temperature range	-10°C to +70°C
Operating force	20 ~ 130 gf
Stopper strength	5 Kgf / 10 sec
Lever push-pull strength	5 Kgf / 10 sec
Lever wobble (mm)	2 (2xL/25) (Both sides)
Lever deviation (mm)	0.5 max. (One side)
Solder heat resistance	Lower than 260°C for less than 5 seconds
Total resistance (KΩ)	5、10、20、50、100、250、500
Total resistance tolerance	±20%
Resistance taper	A,B,C
Insulation resistance	100MΩ min. 250V DC
Voltage proof	1 minute 250V AC
Sliding service life	50,000 cycles
Rated voltage	10V D.C
Maximum current	400~800mA

# SLIDE POTENTIOMETER

## Low-Profile With Motor Type

### DIMENSIONS

Unit : mm

