

◆ FEATURE

- 1.35mm height contribute to smaller sets.
- Snap-in can be directly mounted on PC board.
- Available with anti-ESD ground terminal.

◆ APPLICATIONS

- For Notebook 、 Monitor 、 Tablet PC 、 Healthcare devices 、 Navigation devices 、 Bluetooth products etc.

◆ COMMON SPECIFICATIONS

Characteristics	Specification
Operating temperature range	-20°C to +70°C
Operating force	160 、 220 gf
Travel	0.2mm
Dimension	3.55 * 4.7 * 1.35mm
Operating life	100,000 cycles
Stopper strength	3 Kgf / 60 sec
Maximum ratings	DC12V 50mA
Insulation resistance	100MΩ min
Voltage proof	1 minute 250V AC


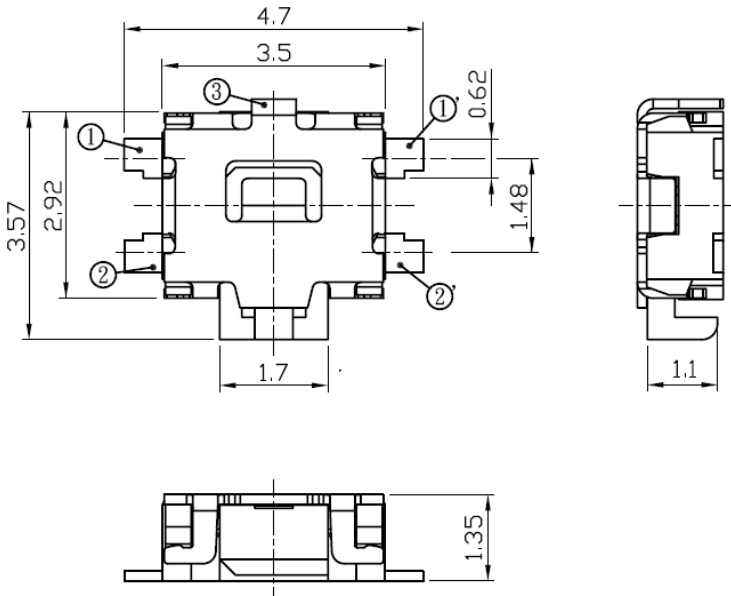
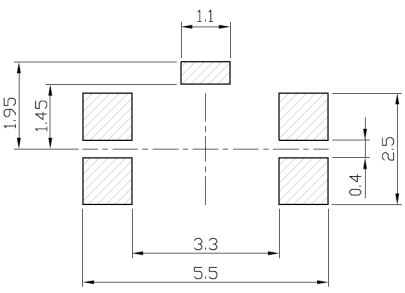

◆ DIMENSIONS


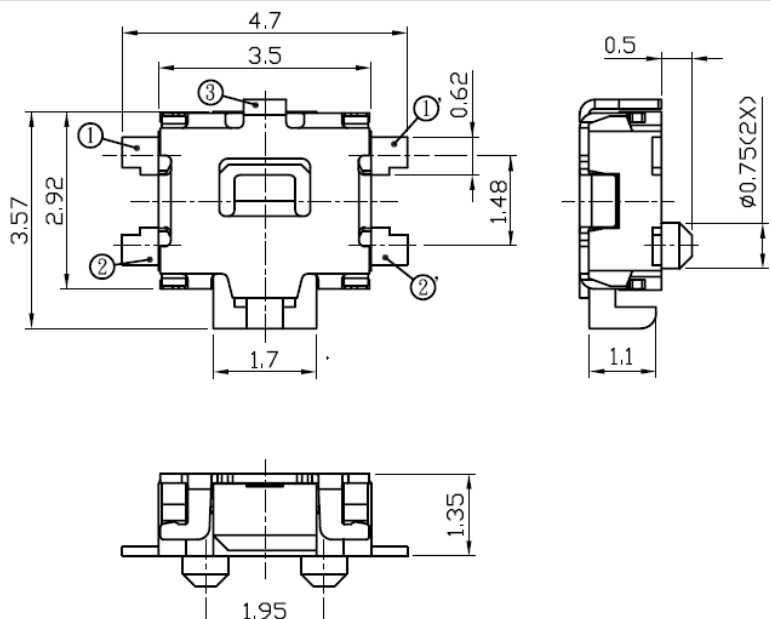
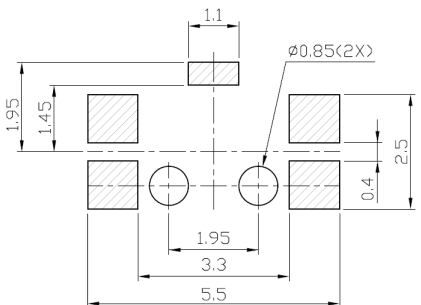

Unit : mm

Model	Dimensions	
SFNSCMA SERIES		
	<p>PC board t=1.0 Mounting Dimension</p>	<p>Circuit Diagram</p>

◆ DIMENSIONS


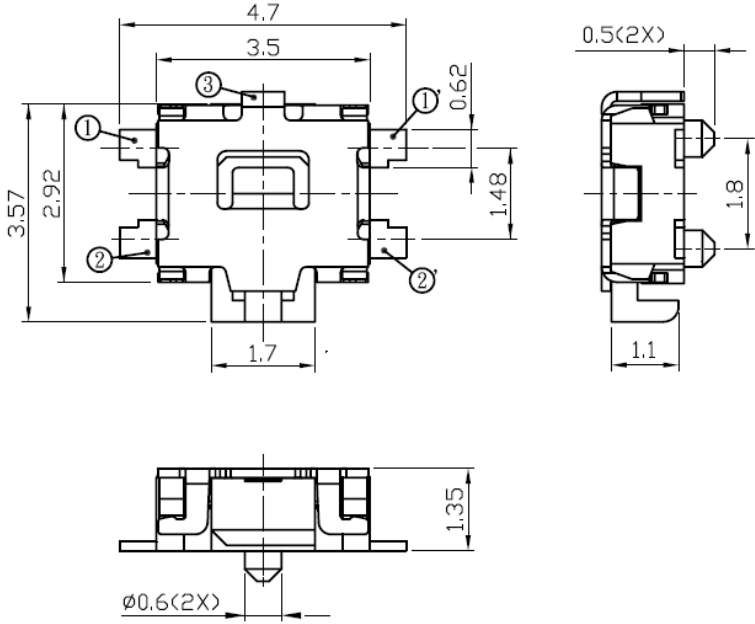
Unit : mm

Model	Dimensions	
<p>SFNSCMP SERIES</p> 		
<p>PC board t=1.0 Mounting Dimension</p>		<p>Circuit Diagram</p> 

<p>SFNSCMQ SERIES</p> 		
<p>PC board t=1.0 Mounting Dimension</p>		<p>Circuit Diagram</p> 

◆ DIMENSIONS

Unit : mm

Model	Dimensions	
<p>SFN5SCMR SERIES</p> 		
	<p>PC board t=1.0 Mounting Dimension</p>	<p>Circuit Diagram</p>
	